

AD 410

Doosan
Mecc Alte
D+ &



ISO8528

GC ,) &

SZUTEST

GC - \$\$\$

CE

2000/14/EC

&\$\$\$#(#

z) \$' z' z' D:

	"	"	"	"	Amp
400/230	410,00	328,00	375,00	300,00	541,00

fPQDE

GC ,) &

,) & z

fDF DE

%\$1

% %&

GC " \$(**

z&(

GC

Standard Specifications

z

fl

E

z

z

ALTERNATOR

D: A Z 5J F

TRANSFER SWITCH

AD 410

Doosan
Mecc Alte
D+' &'

1

Manufacturer		Doosan		
Model		P158LE-1		
		%\$\$' "# "		
		' *&\$\$' "		
		Q,) \$\$\$< DQ		
	L	14,600		
	"	128 x 142		
		15,0:1		
	fl # 7	"# "	1500	
	fl 7	L	21,00	
		L	88,50	
AbsorbedAirDischargeReSourceKey.Text	' # "	23,50		
	' # "	410,00		
fl ' # 7	' # "	59,50		
	° C	520,00		
		24 V d.c.		
	Load	%\$\$i	'+) i) \$i
	# "	78,70	58,40	40,00

2

		Mecc Alte		
		ECO 40-1S/4		
	Hz	50		
	"	400,00		
7cg'		0,80		
		3		
	fl 7	400/230		
	A	577,00		
Temperature		H		

3

		fl 7		fl 7	
	"	"	"	"	L
AD 410	3030,00	2965,00	1550,00	1994,00	700,00
		fl 7		fl 7	
	"	"	"	"	L
MS 70	4024	4400	1560	2360	700

AD 410

Doosan
Mecc Alte
D+' &''

f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B'*\$-\$)'\$

6G'9B'*\$\$\$!*!&

6G'9B'*\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&*(

&(\$)

ž


ž

ž

ž

AD 410

Doosan
Mecc Alte
D+ &''

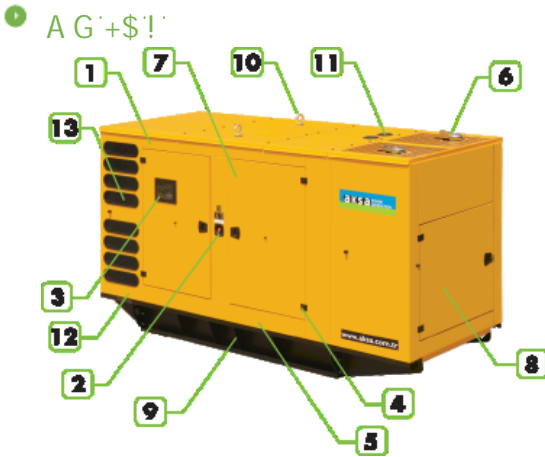

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1560
fl "L	"	4400
fl "L	"	2360
	L	700